

## Installation Guide : SCU-1 & HE Safety Switches

### Keep this guide for future reference

This information is designed to help suitably qualified personnel install and operate Mechan Safety equipment. Before using this product, read this guide thoroughly along with any relevant European and/or National standards e.g. Machinery Directive 2006/42/EC and it's amendments, Provision and Use of Work Equipment Regulations.

Further information can be obtained from Mechan Controls

### Description

Mechan HE safety switches are magnetically coded, solid state non-contact safety switches for use in machine guarding applications.

Non-contact operation makes the HE switches easy to install and tolerant to misalignment. The solid state design is even more tolerant to shock and vibration, and provides single point switching which makes for a simpler and more reliable machine guard interlock.

The additional security of the coded magnetic operation along with fully sealed IP67 rating make these switches ideal for use in wet or dusty and harsh environments.

The HE safety switches have been designed to connect to the SCU-1 Safety Control Unit. When installed correctly, up to 30 switches can be installed in series.

### Operation


The HE safety switch has 2 x N/O + 1 N/C bi-directional solid state outputs along with built in LED(s) for indication. When installed on a machine guard, power is applied, and the switch and actuator are within the specified operating range, the N/O Outputs will be closed, the N/C Output will be open. When the actuator moves out of the operating range, the N/O Outputs will open, the N/C Output will close. (See page 3 for LED Indication.)

The HE safety switch and actuator have an 7mm switching distance and can approach each other from most angles. When the switch is closed the targets on the printed face of the switch must be aligned.

To avoid physical damage, do not use the switch and actuator as a stop, leave a 1-2 mm gap for best operation and tolerance to machine guard vibration.

### Applications

Interlocked guards where additional security required.  
Door locking is not required.  
Harsh environments where vibration, water or dust are problems.  
Food and Beverage packing/filling systems  
Dairy Pharmaceutical Paper Industry  
Can Forming and Filling, (Aluminium, Steel, Plastic)  
Semi conductor Manufacture/Assembly.

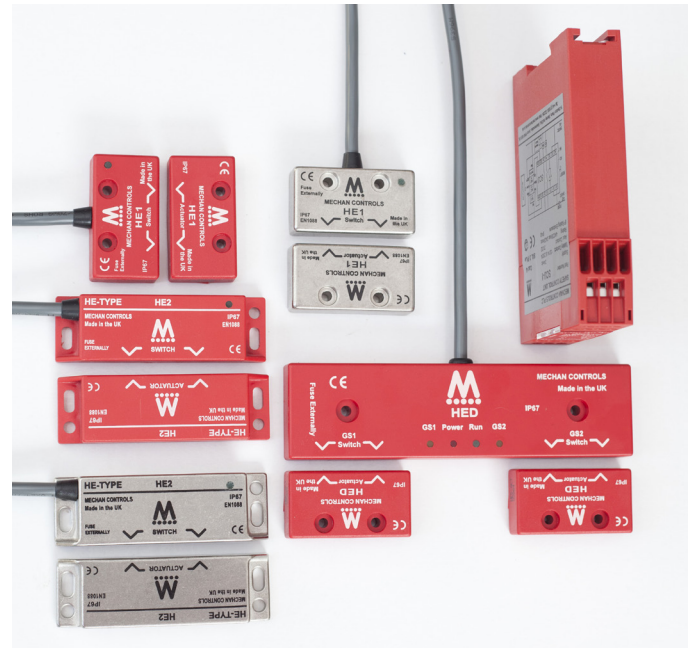

CAT 4  
SIL 3 PLe


APPROVALS	
CE	Complies with all relevant sections of the CE marking directive
TUV	CAT 4 SIL 3 PLe
EUROPEAN DIRECTIVES	
Machinery Directive 2006/42/EC	
Low Voltage Directive 2006/95/EC	
Electromagnetic Compatibility Directive 2004/108/EC	
EUROPEAN STANDARDS	
EN ISO 13849-1	Safety of Machinery Safety related parts of control systems
EN ISO 62061	Safety of Machinery - Functional safety of safety related electrical, electronic and programmable electronic control systems
EN 60204	Safety of Machinery Electrical equipment for machines
EN 60947-5-1	Low voltage switch gear and control gear
EN 1088	Interlocking devices associated with guards
EN 60947-5-3	Safety of Machinery Specification for low voltage switchgear and control gear

### Declaration of Conformity

See back page for declaration of conformity.

## SAFETY CONTROL UNIT


### Mounting on 35mm DIN Rail

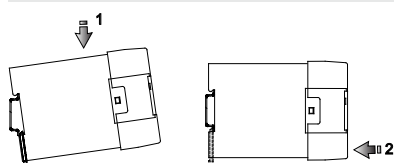

The control modules are designed to be mounted in an IP55 (minimum) control cabinet.

The modules clip on to standard 35 mm symmetric DIN-Rail

### Removal from 35mm DIN Rail

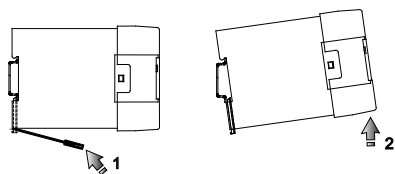

To remove the modules, gently lever out the DIN clip with a small screwdriver as shown (1).

Tilt the unit in the direction (2) and slip the unit off the DIN Rail


### Indication

#### POWER

When power is connected, the red LED will be illuminated


#### OUTPUT

When K1 & K2 are illuminated green, the outputs 13/14 & 23/24 will be closed and 31/32 will open.




## CONTROL UNIT RESET

To remove lid, use small screwdriver in the lid recess as shown and prise gently upwards.

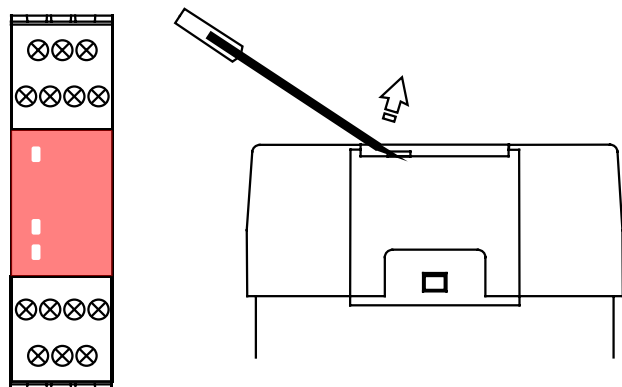


### Manual Reset



Internal switch is set to the LOWER position

Circuit X1/X2 requires a momentary N/O button to initialise reset.

### Automatic Reset



Internal switch is set to the UPPER position

Circuit X1/X2 requires a link. NOTE: Closed contacts on K3 & K4 can still be monitored

## SAFETY SWITCHES




### Mounting the Safety Switches

Do not use safety switches as a stop. 1 mm separation when closed provides the best results.

Minimum separation 50mm between adjacent switches.

DO NOT mount on hinged side of the guard.

EN1088 : Hide the actuator where possible.

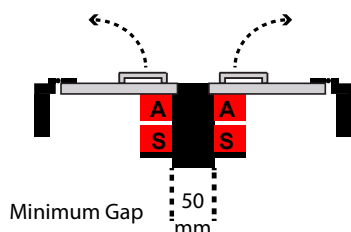


SAFETY SWITCHES


Indication

	HE1	HE2	HED			
			GS1	Power	Run	GS2
Power Off	Off	Off	Off	Off	Off	Off
Power On Gate(s) Open	Red	Red	Off	Red	Off	Off
Power On Gate Closed	Green	Green	Yellow	Red	Off	Off
Power On Gate 1 and 2 Closed			Yellow	Red	Green	Yellow

HE1 HE1-SS, HE2 & HE2-SS

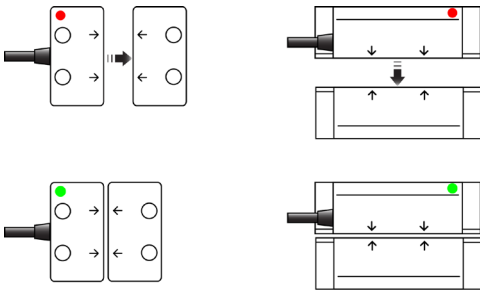


HED

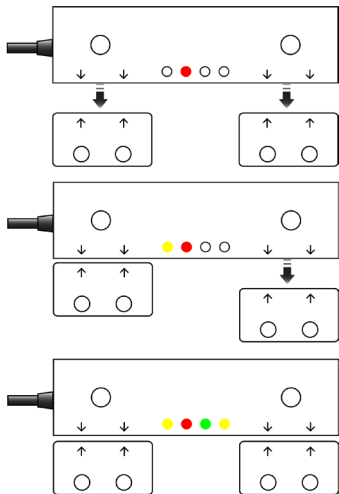


Operation

The HE Safety switches are extremely versatile and can approach each other from any angle without false tripping. When the guard is closed the targets on the printed face of the switch and actuator must be aligned.

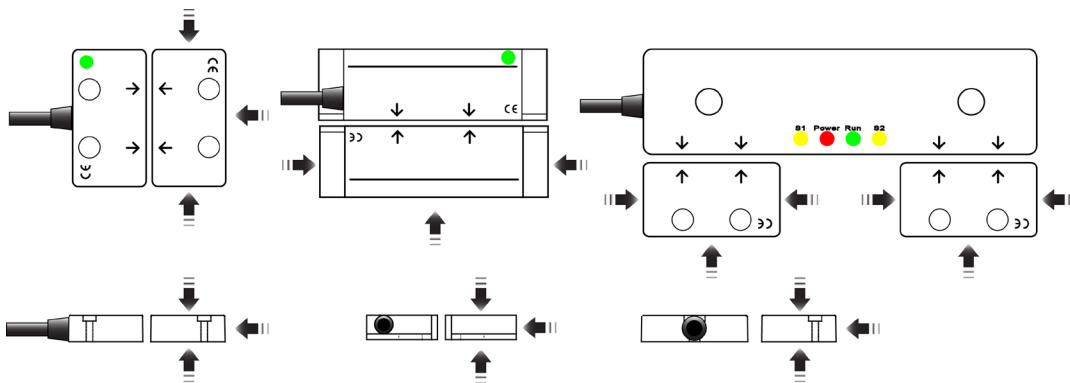


Switching Characteristics

The chart shows the switching points in millimetres.

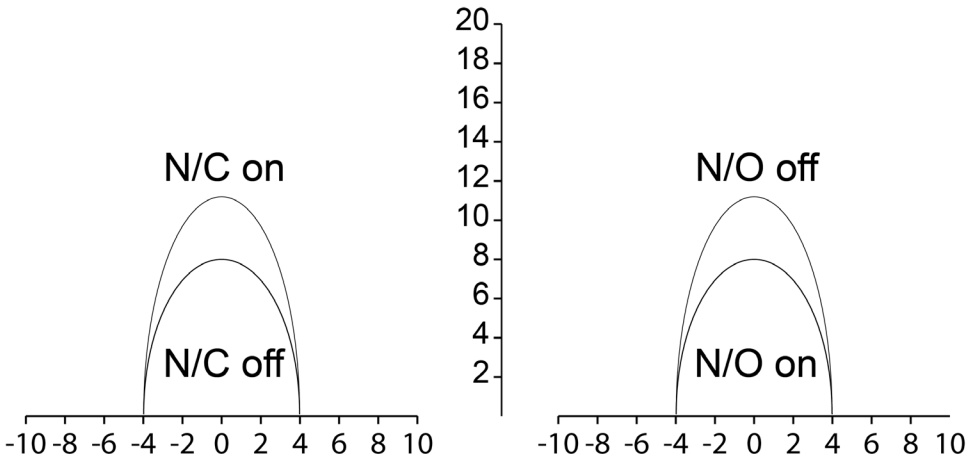


## CONNECTIONS & FUSES


### Pre-wired Switches

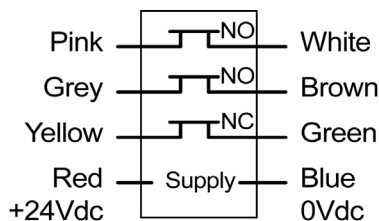

**HE1 / HE2 / HED**  
Contacts 2NO + 1 NC

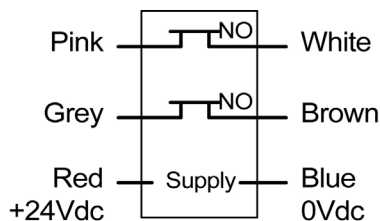


**HE1 / HE2**  
Contacts 2NO

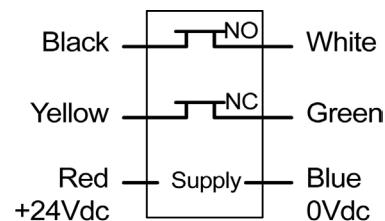


**HE1 / HE2**  
Contacts 1NO + 1 NC

### M12 Leaded Quick Disconnect

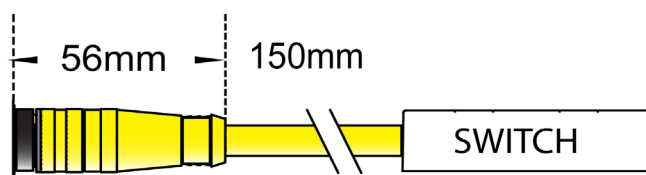


**M12 Leaded Quick Disconnect (LQD)**  
HE1 / HE2 / HED Contacts 2NO + 1 NC

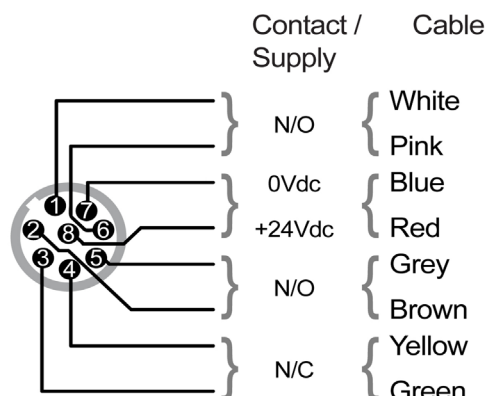


**CONTACT OPERATION** -The N/O contact(s) on Mechan safety switches are open when the actuator is away from the switch. When the actuator is within the specified operating distance the N/O contact(s) will close and the N/C contact will open

**FUSES** - All contacts should have external fuses fitted. Fuse Rating = 400mA Quick Blow

### CONNECTION FOR A SINGLE SWITCH

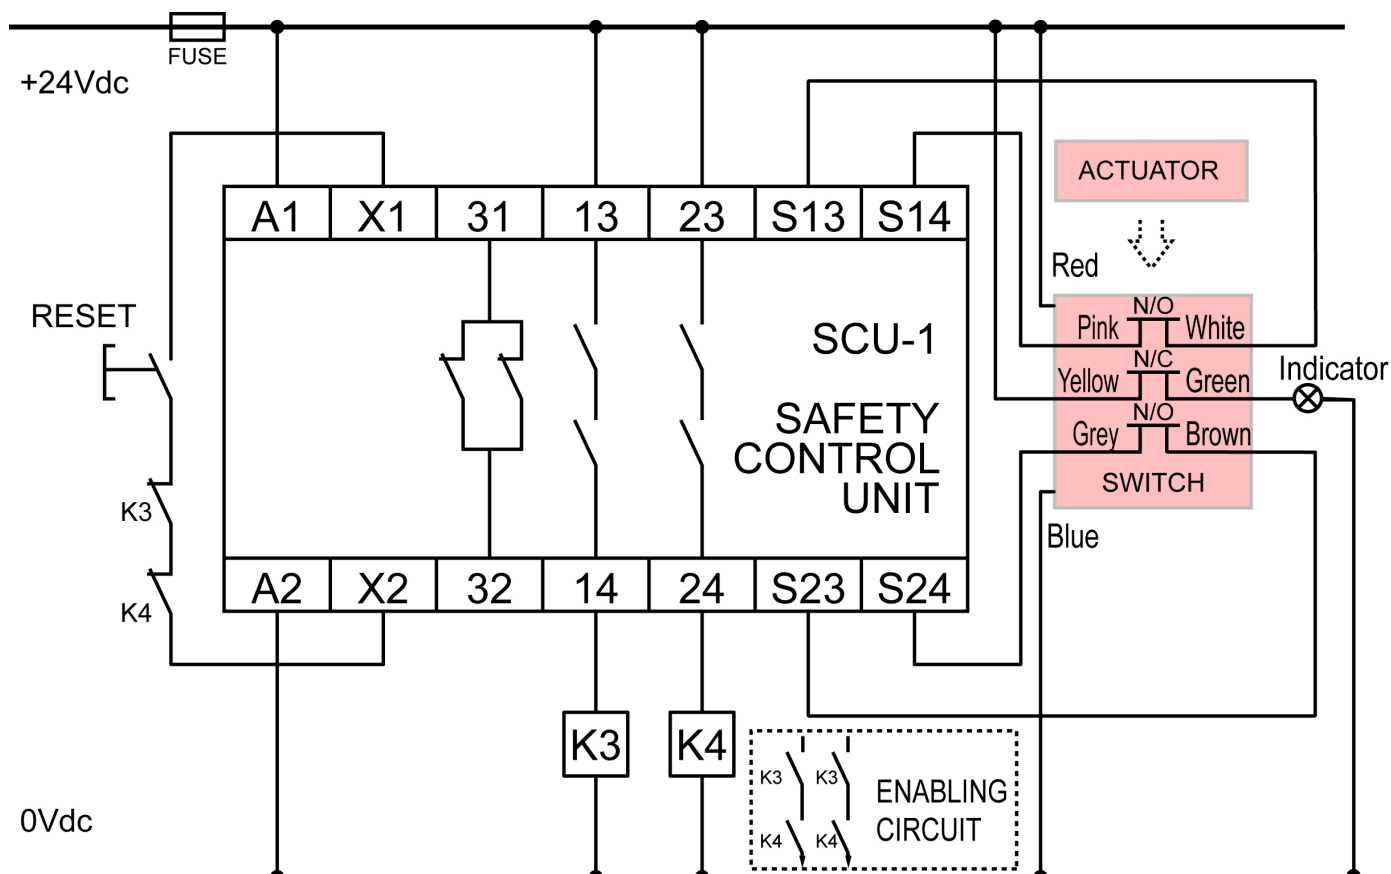


CONNECTION FOR UP TO 30 SWITCHES

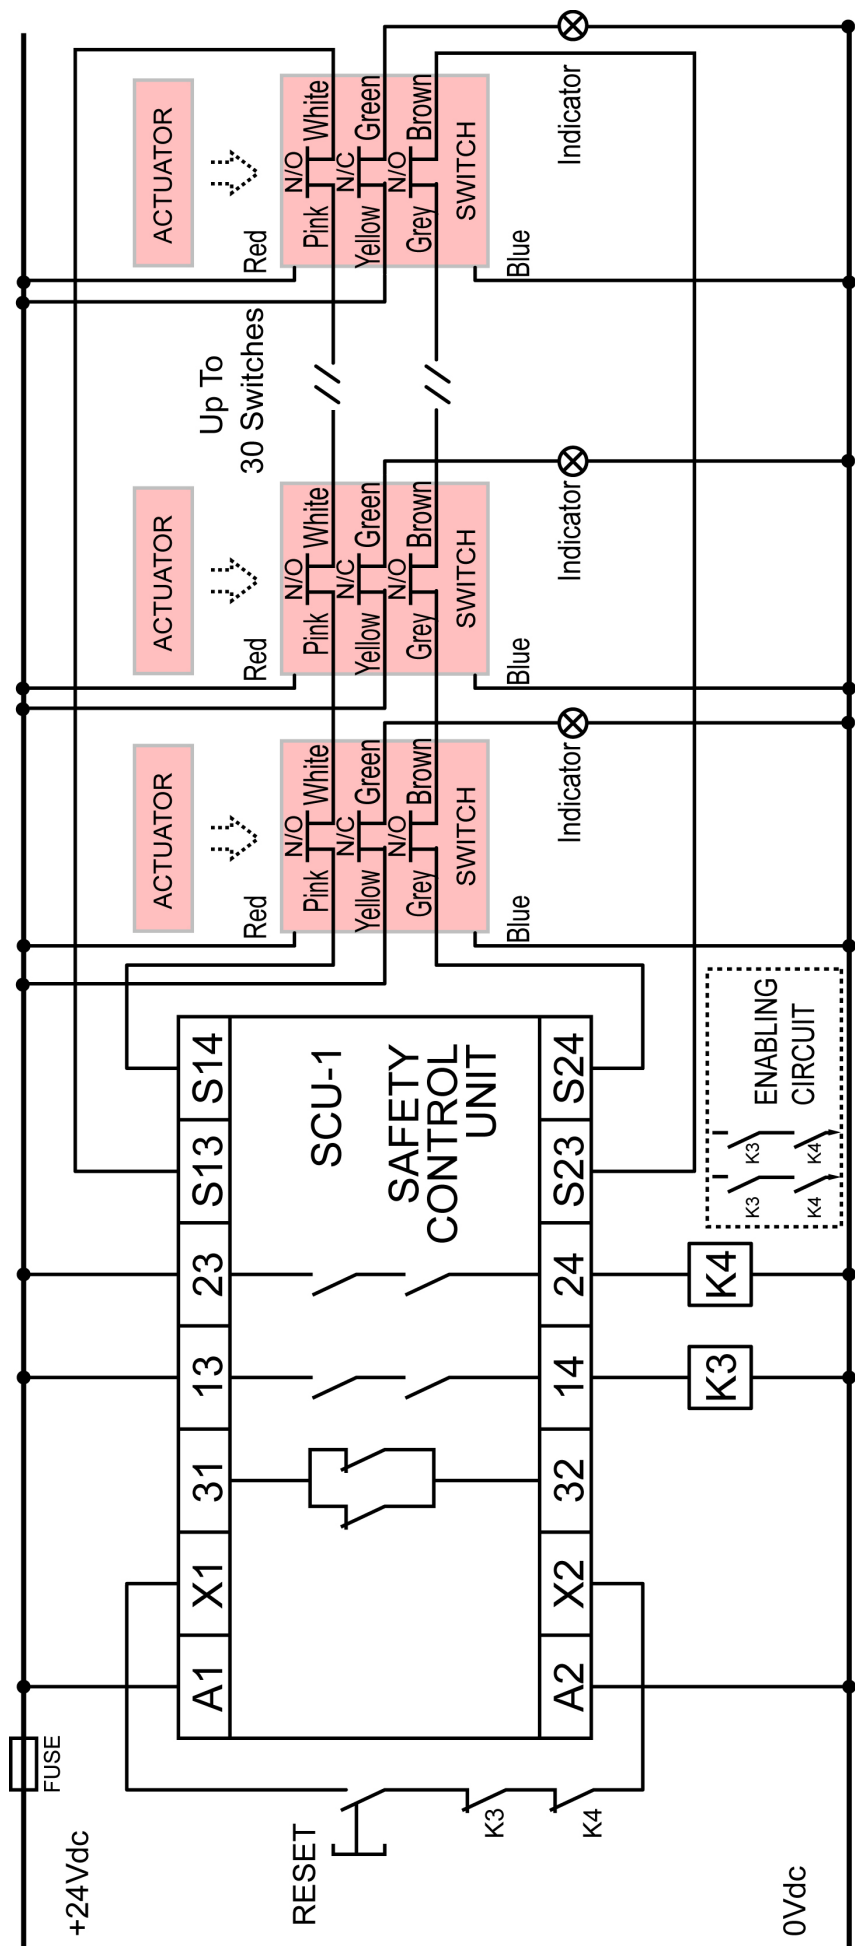

## DIMENSIONS



### Control Unit

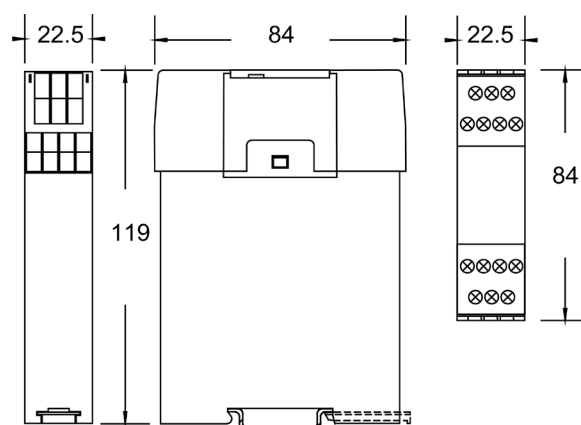

### Safety Switches



#### HE-1

#### HE-1-SS

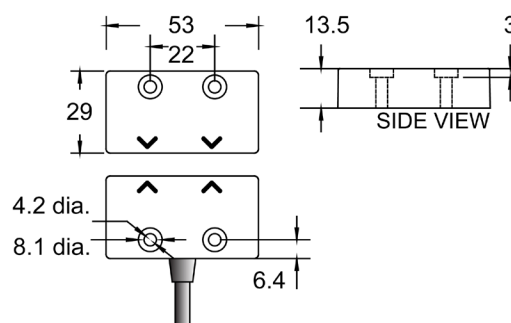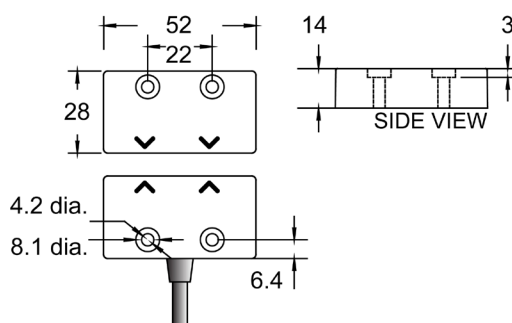

#### HE-2

#### HE-2-SS

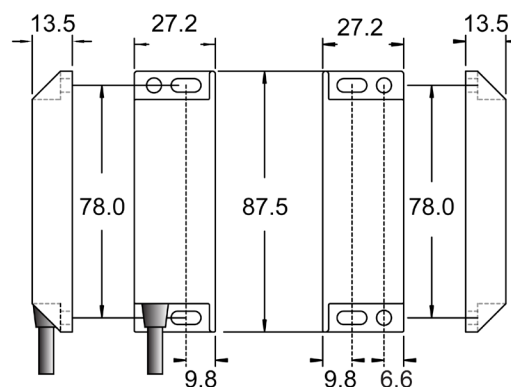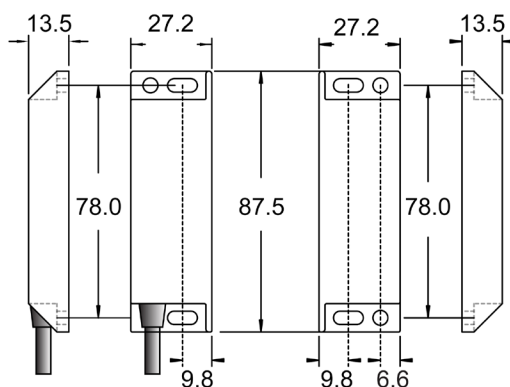

#### HE-D

##### NOTE

HED switch has three options for cable exit to ensure easy installation:

HED-21-DC-xxC

Cable exit in centre of switch (1)


HED-21-DC-xxL

Cable exit from left hand side of the switch (2)

HED-21-DC-xxR

Cable exit from right hand side of the switch (3)

xx= cable length or lqd

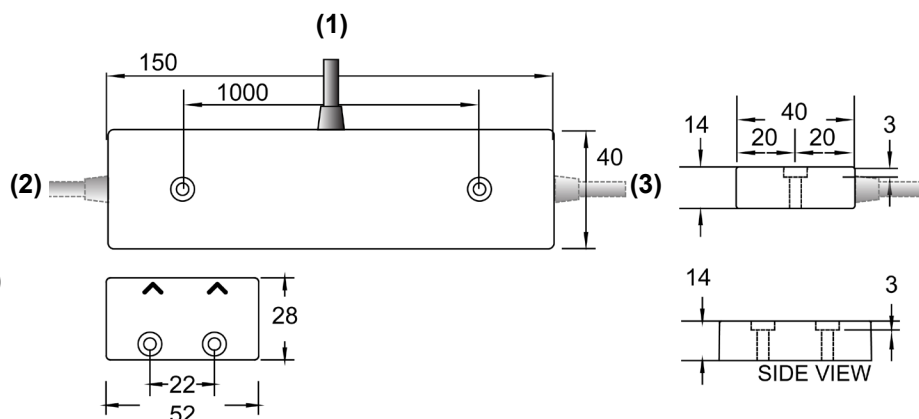

## TECHNICAL SPECIFICATIONS

SAFETY CONTROL UNIT			
Supply nominal voltage		24Vac/dc (+/- 15 %)	
Nominal power consumption		3VA	
Safety contacts		2 x NO	
Auxiliary contact		1 x NC	
Output contact rating (max)		4A/230Vac; 2A/24Vdc(Res.)@Cos=1	
Output contact rating (min)		10V/10mA	
Output contact fuse rating		AC=5A; DC=2.5A; Quick blow	
Drop out time		Deactivation by inputs, 13ms	
Internal fuse		100mA Resetable	
Internal fuse recovery time		>2 Seconds	
Internal switches		Reset Manual / Automatic—Selectable	
Max conductor size		1 x 2.5mm stranded with sleeves, 1 x 4mm solid	
Installation group (Control unit)		C in accordance with VDE0110	
Enclosure protection		Housing IP40, Terminals IP20	
Operating temperature		-10C to +55C (85% Humidity max)	
Storage temperature		-20C to +60C	
Housing material		Polycarbonate Red	
Mounting / Fixing		35mm Symmetric DIN Rail	
Utilisation category in accordance with EN 60947-4-1			
Safety contacts:AC1 at 230 V		Imin:10mA.Imax:4A	
Safety contacts:DC1 at 24 V		Imin:10mA.Imax:2A	
Air gap creepage in accordance with EN 60947-1		Vibration In Accordance With EN 60068-2-6	
Pollution Degree	2	Weight	210g
Overvoltage Category	III	Frequency	10-55Hz
Rated Insulation Voltage	250V	Amplitude	0.35mm
Rated Impulse Withstand Voltage	4.0KV		
Simultaneity Channel 1		∞	
Simultaneity Channel 2		∞	

SAFETY RELATED DATA	
PL In accordance with EN ISO 13849-1	PL-e, CAT 4
SIL CL in accordance with EN IEC 62061	SIL 3
PFHd in accordance with EN IEC 62061	$3.62 \times 10^{-09}$
PFH	$4.43 \times 10^{-09}$
B10d	$2 \times 10^6$
MTTFd	>100 years ( Based on usage rate of 360 days/year, 24 hours/day, 10 operations/hour )
Tm(mission time)	20 years
DC	96.5%
SFF	98.2%

SAFETY SWITCHES	
Operation	Coded Non-contact
Contact Arrangements	2 x N/O + 1 x N/C
Safety Contact Operating Distance	7mm ON / 12mm OFF
Safety Contact Rating	DC: 24Vdc / 400mA
Auxilliary Contact Rating	DC: 24Vdc / 400mA
External Fusing ( When not using SCU-1 )	400mA
Dimensions	See page 6
IP Rating	IP67
Cable Length	100 Metres max
Operating temperature	-10 to +55C
Storeage temperature	-20 to +60C
Mounting	Target to target
Construction	Red ABS Resin Filled or 316 Grade Stainless Steel resin Filled



## Declaration of Conformity

We hereby declare that the products identified below conform to the relevant Essential Health & Safety Requirements of the European Machinery Directive (2006/42/EC), EMC Directive (2004/108/EC) and other relevant EC Directives as listed below.

Mechan Product	Standards
<b>HE Series</b>	BS EN60204-1:2006 – Safety of Machinery, Electrical equipment of machines. General requirements.
<b>SCU-1</b> Safety Control Unit	BS EN60947-5-3:1999 + AMD 1 04.2005 – Low voltage switchgear and control gear –
<b>HE-1</b> Safety Switches	Part 5-3: Control circuit devices and switching elements – Requirements for proximity devices with defined behaviour under fault conditions.
<b>HE-2</b> Safety Switches	BS EN60947-5-1:2004 – Low voltage switchgear and control gear –
<b>HED</b> Safety switches	Part 5-1: Control circuit devices and switching elements – electro- mechanical control circuits.
	EN ISO 13849-1 : 2008 Safety of Machinery, Safety –related Parts of Control Systems
	EN 62061 : 2005 Safety of Machinery,-- Functional Safety of Safety elated electrical ,electronic and programmable electronic Control Systems
	BS EN61000-6-4:2007 – EMC Generic emission standard. Industrial.
	BS EN61000-6-2:2005 – EMC Generic immunity standard. Industrial.

EC-type examination No. 44 205 10 385597 Notified body 0044, TÜV NORD CERT GmbH, Langemarckstr. 20, 45141 Essen, Germany.

[ 2002/95/EC Restriction of the use of certain Hazardous substances (RoHs) ]  
The overall machine must comply with the machinery directive. For further information please contact Mechan Controls Plc.

Authorized Signature



W. Boardman

WA Boardman, Managing Director – July 2011

### Maintenance


It is recommended to check the safe operation of the of the switches and look for signs of damage or excessive wear on a weekly basis. Damaged units should be replaced or returned to the manufacturer for repair where practical.

### Notes

In the interest of product development specifications are subject to change without notice.

It is the responsibility of the user to ensure compliance with any acts or by-laws in place.

All information regarding Mechan equipment is believed to be accurate at the time of printing. Responsibility cannot be accepted for errors or omissions.



**NORSTAT INC.**

300 Roundhill Dr. Rockaway, NJ 07866

[www.norstat.com](http://www.norstat.com), [www.norstatblog.com](http://www.norstatblog.com)  
PH 973-586-2500, FX 973-586-1590